


StealthTouch: How to add MSR



1. Remove 2 screws (see circles) to open the MSR panel.

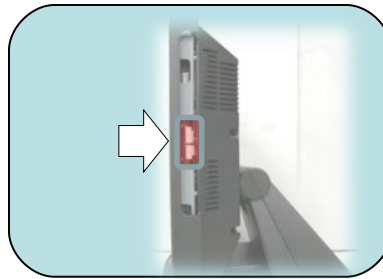

or



4. Slide MSR into the slot.
5. Screw to secure.

2. For keyboard wedge MSR (part# 46-Dxx), plug to the internal connector.

3. For USB or Serial, plug to the respective system's port.