


StealthTouch: How to Install a Rear Display

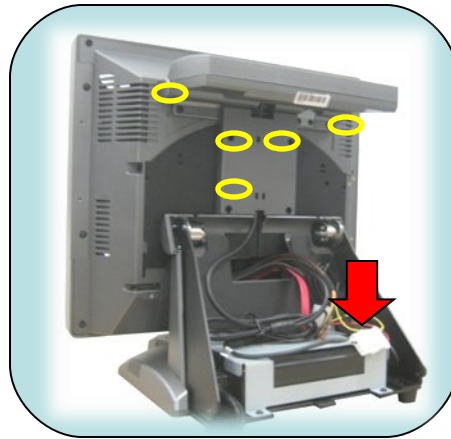

1. Turn off system.

2. Pull open the Base's cover (see arrow.)

3. Mount the display, and screw to secure (see 5 circles.)

4. Connect power cable (see Red arrow.)

5. Route Serial cable to the front of the unit, and plug into the desired Serial COM port.

6. Cut slot to route the display's cable.

7. Close the Base.